



EU STANDARDS

Equipment designed to
comply with all the
applicable EU directives
and regulations



MADE IN EUROPE

All components made
exclusively by European
manufacturers



VAST EXPERIENCE

Practical experience in
specialist desiccant
dehumidification systems



TECHNICAL DATASHEET

Desiccant dehumidifier DL10

GENERAL INFORMATION

The DL Series has been designed for use across a wide range of process drying applications and rooms requiring precise humidity control. The compact design allows for ease of installation in spaces with restricted access. This advanced series features a user friendly touch screen HMI as standard, providing users an array of information on the health and performance of the unit. Units are low maintenance allowing for extending periods of continuous operation.

In addition to the above mentioned applications, desiccant dehumidifiers are also irreplaceable in:



Protecting against condensation



Reducing building construction drying



Flood damage building drying



Increasing shelf life of hygroscopic materials



Achieving product consistency and accelerated product drying




Humidity Control in storage facilities to maintain product and packaging quality



Reducing the growth of mould and bacteria

METHOD OF OPERATION

Desiccant dehumidifiers operate by removing water vapour from the air via the process of adsorption. At the heart of the process is a high capacity, active silica gel rotor. As standard, the DL series also feature internal heat recovery as standard via a purge sector, this sector reclaims heat that would otherwise be transferred into the dry air stream. The water vapour is continuously removed via the “wet air” stream, allowing for continual drying operation. Precise drying is achieved through the regulation of the reactivation air heater. No desiccant carryover is experienced due to the unique composition of the rotor.

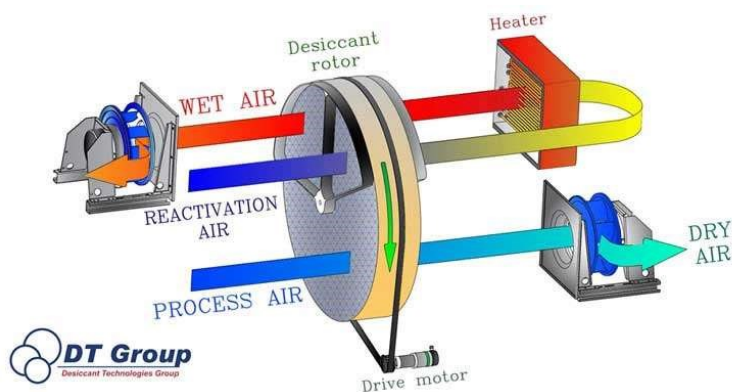

CONSTRUCTIONAL AND UNIT FEATURES

- Hermetic casing construction to exceed BSEN 1886—L1 leakage rate
- 20mm insulated panels
- Available in a range of casing materials (430SS, 304SS)
- Energy efficient EC fans.
- Single piece, compact design, allowing for rapid installation
- Pre and Post Treatment modules available
- Low maintenance design and long life seals
- High quality components made exclusively by European manufacturers
- User friendly touch screen HMI as standard

TECHNICAL DATA (Standard unit, other configurations available)

Process air (Dry)		Control System	
Rated airflow	850 m³/h	Controller	SIEMENS
Available static pressure	350 Pa	Display Type	Touch Panel
Reactivation air (Wet)		Communications (Options)	MODBUS
Rated airflow	250 m³/h		BACNET
Available static pressure	350 Pa		
Power Supply		Miscellaneous data	
(3x400V, 50 Hz)	7.3 kW	Weight (Subject to final configuration)	198 kg
Current	11 A	Operational temperature range	-30/+40°Cdb
Dehumidification Capacity		Panel Insulation	20mm
At 20.0°Cdb, 60% RH	5.1 kg/h	Filtration	EU4
		IEC protective class	IP54
		Max noise level (without ductworks)	69 dBA



DEHUMIDIFICATION CAPACITY


	50%	60%	70%	80%	90%
5.0°C	2.3	2.7	3.2	3.7	4.1
10.0°C	3.2	3.7	4.2	4.7	5.0
20.0°C	4.5	5.1	5.4	5.8	6.1
30.0°C	5.2	5.7	6.0	6.3	6.5

Approximate capacity in kg/h at different inlet process air relative humidity (%) and temperature (°Cdb): Reactivation air inlet +20.0°Cdb, 60% RH

TECHNICAL DATASHEET

Desiccant dehumidifier DL10

Dimensions (Standard Unit)

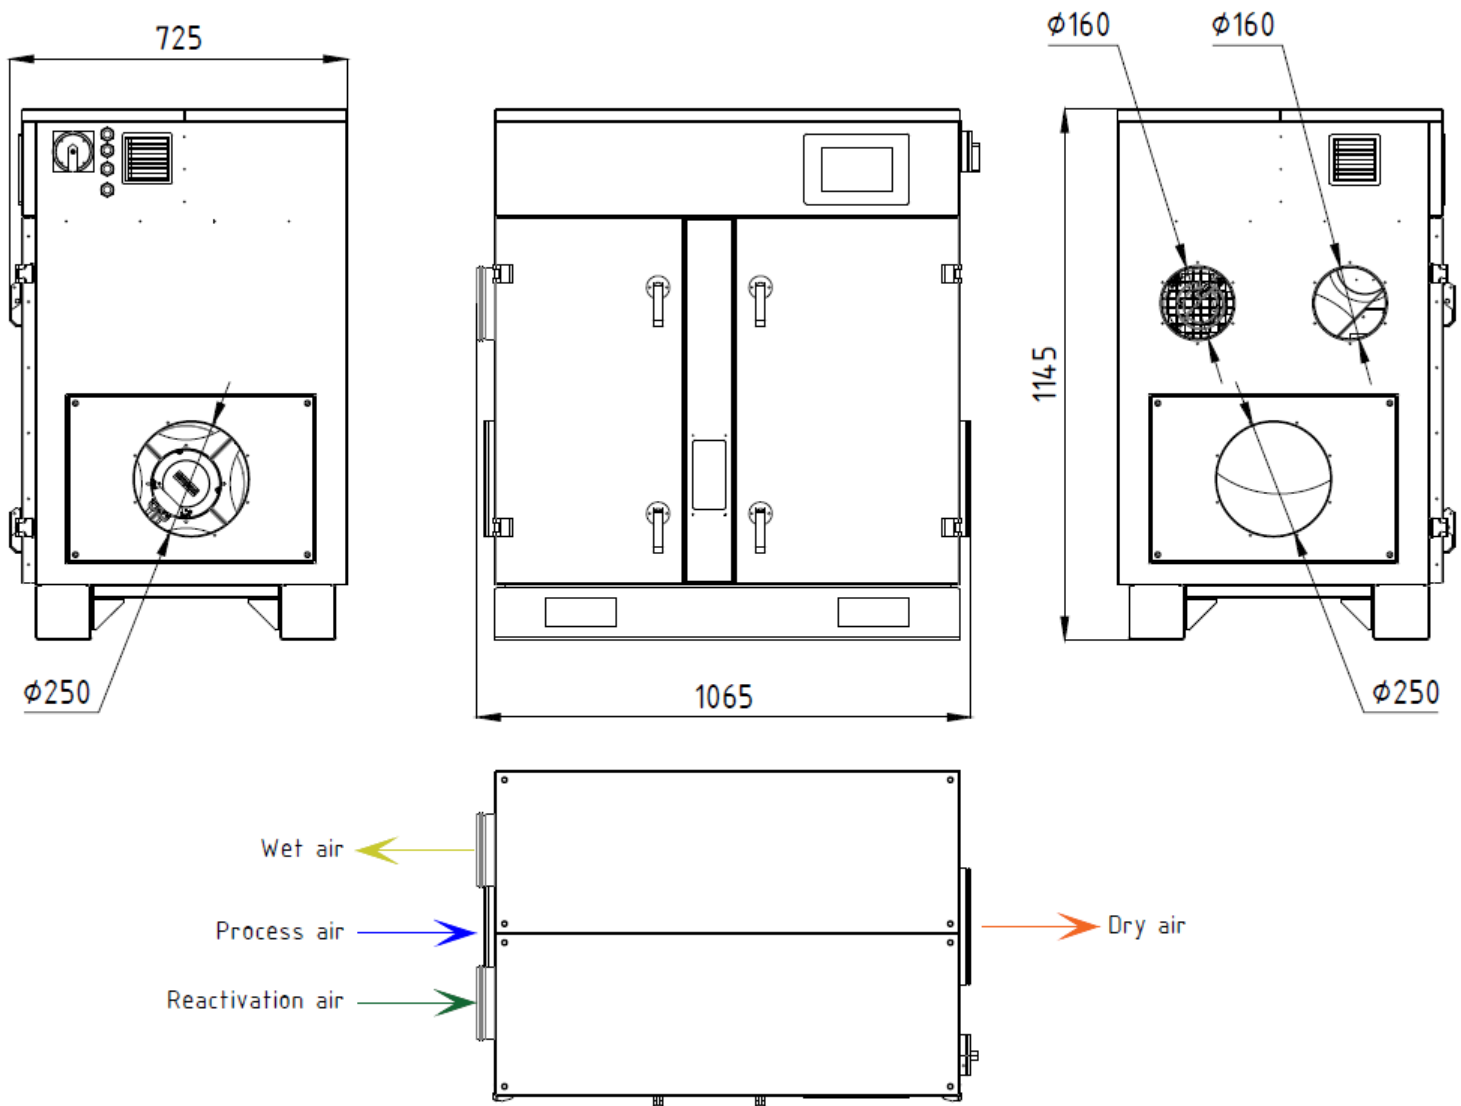

Dimensions are approximate and are subject to final unit configuration.

TECHNICAL DATASHEET

Desiccant dehumidifier DL10